


PRODUCT SUBMITTAL 1114

EVERLOC+ CPVC Spigot Adapters



Product: EVERLOC+® CPVC Adapters, PEX to CPVC Spigot

Date: 01 April 2023

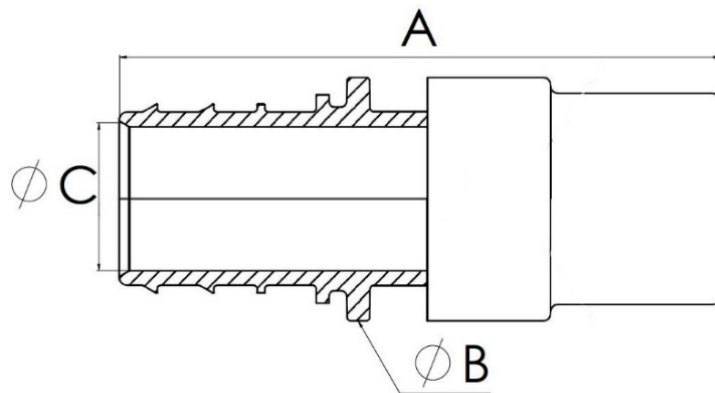

Article no.	Nominal size in.	A in (mm)	B in (mm)	C in (mm)
455701-001	1/2 x 1/2 CPVC spigot (male)	2.01 (51.1)	.072 (18.5)	0.38 (9.7)
455703-001	3/4 x 3/4 CPVC spigot (male)	2.60 (66.0)	1.02 (26.0)	0.60 (15.3)
455704-001	1 x 1 CPVC spigot (male)	3.24 (82.3)	1.30 (33.0)	.077 (19.6)
455706-001	1 1/4 x 1 1/4 CPVC spigot (male)	3.61 (91.7)	1.57 (40.0)	0.95 (24.2)
455708-001	1 1/2 x 1 1/2 CPVC spigot (male)	4.13 (104.8)	1.88 (47.7)	1.14 (28.9)
455710-001	2 x 2 CPVC spigot (male)	4.81 (122.2)	2.44 (62.0)	1.50 (38.2)

TECHNICAL DESCRIPTION

Specification	ASTM F877 / CSA B137.5 / ASTM D2846
Material	ECO BRASS and CPVC
Certifications	cNSFus-pw

For updates to this publication, visit na.rehau.com/resourcecenter

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2023 REHAU

PRODUCT SUBMITTAL 1114

EVERLOC+ CPVC Spigot Adapters



FUNCTIONAL DESCRIPTION

EVERLOC+ compression-sleeve fittings and sleeves are designed specifically for use with REHAU PEXa pipe. The maximum temperature and pressure ratings of the EVERLOC+ compression-sleeve fitting system is in accordance with ASTM F877 and CSA B137.5 for SDR9 PEX, see REHAU pipe product submittals for ratings. Installation is performed with EVERLOC+ compression-sleeve tools. Follow all published REHAU Technical Guidelines. All EVERLOC+ fittings and sleeves comply with the lead-free (LF) requirements of the U.S. Safe Drinking Water Act.

NOTICE: When using EVERLOC+ CPVC adapters, CPVC connections must be made prior to an EVERLOC+ compression-sleeve connection.

- Follow CPVC pipe and solvent manufacturer's instructions for installation and cure time
- Ensure CPVC glue is entirely cured before making an EVERLOC+ compression-sleeve connection
- If CPVC glue comes in contact with an EVERLOC+ polymer fitting or EVERLOC+ PEXa compression sleeve, discard the affected fitting or sleeve
- If CPVC glue comes in contact with RAUPEX pipe, cut off and discard area that was affected.

For updates to this publication, visit na.rehau.com/resourcecenter

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2023 REHAU