


PRODUCT SUBMITTAL 2406

REHAU F1960 Closed-End Stub Out Ells



Product: REHAU F1960 Closed-End Stub Out Ells

Date: 27 March 2024

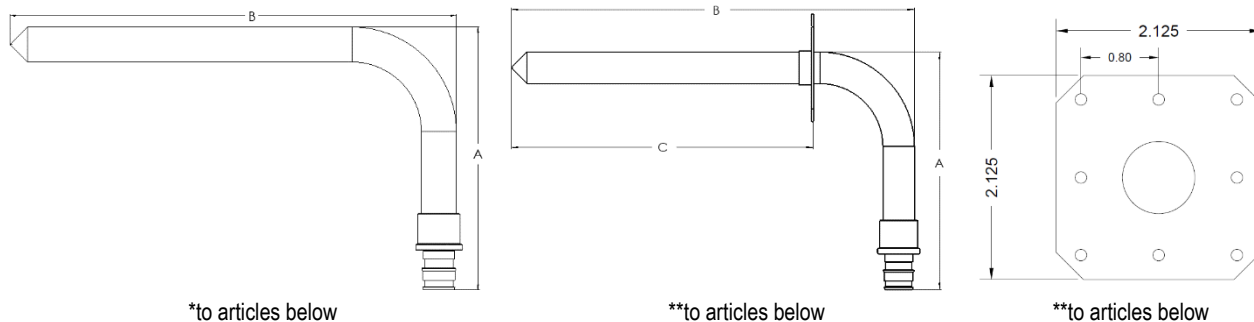

*to articles below

**to articles below

**to articles below

Article No.	Nominal Size in	A in (mm)	B in (mm)	C in (mm)
499298-001	1/2 x 1/2 Copper Tube*	4.70 (119.4)	8.00 (203.2)	n/a
499364-001	3/4 x 3/4 Copper Tube*	5.60 (142.2)	8.00 (203.2)	n/a
499365-001	1 x 1 Copper Tube*	6.08 (154.4)	8.00 (203.2)	n/a
499299-001	1/2 x 1/2 Copper Tube with Mounting Plate**	4.70 (119.4)	8.00 (203.2)	6.00 (152.4)
499307-001	3/4 x 3/4 Copper Tube with Mounting Plate**	5.70 (144.8)	8.00 (203.2)	5.50 (139.7)

TECHNICAL DESCRIPTION

Specification	ASTM F1960 / CSA B137.5 / ASTM B88
Material	ECO BRASS® (C69300 or CW724R) / Copper Alloy C12200 Type L
Certifications	cNSFus-pw

FUNCTIONAL DESCRIPTION

REHAU F1960 stub out ells and rings are intended for use with REHAU PEXa pipes. The maximum temperature and pressure ratings of the REHAU F1960 fitting system is in accordance with ASTM F877 and CSA B137.5 for SDR9 PEX, see REHAU pipe product submittals for ratings. Installation is performed with commercially available F1960 cold expansion tools. Follow all published REHAU Technical Guidelines. All REHAU F1960 fittings and rings comply with the lead-free (LF) requirements of the U.S. Safe Drinking Water Act.

Note: The 2 1/8" x 2 1/8" mounting plate on Art. 499299-001 and 499307-001 can be used to secure stub out ell to building framework.

For updates to this publication, visit na.rehau.com/resourcecenter

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2024 REHAU